





- ▼ 100% R_g & UIS Test
- ▼ Fast Switching Characteristic
- ▼ Simple Drive Requirement
- ▼ RoHS Compliant & Halogen-Free



BV _{DSS}	700V
R _{DS(ON)}	1.4 Ω
I _D ³	3.2A



Description

AP70SL1K4B series are from Advanced Power innovated design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The TO-252 package is widely preferred for commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

Absolute Maximum Ratings @T_j=25°C (unless otherwise specified)

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	700	V
V _{GS}	Gate-Source Voltage	±20	V
V _{GS}	Gate-Source Voltage, AC (f > 1Hz)	±30	V
I _D @T _C =25°C	Drain Current, V _{GS} @ 10V ³	3.2	A
I _D @T _C =100°C	Drain Current, V _{GS} @ 10V ³	2.1	A
I _{DM}	Pulsed Drain Current ¹	8.3	A
dv/dt	MOSFET dv/dt Ruggedness (V _{DS} = 0 ... 400V)	20	V/ns
P _D @T _C =25°C	Total Power Dissipation	28.4	W
P _D @T _A =25°C	Total Power Dissipation ⁴	2	W
E _{AS}	Single Pulse Avalanche Energy ⁵	27	mJ
I _{AR}	Avalanche Current	0.6	A
E _{AR}	Repetitive Avalanche Energy	2.84	mJ
dv/dt	Peak Diode Recovery dv/dt ⁶	15	V/ns
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Value	Units
R _{thj-c}	Maximum Thermal Resistance, Junction-case	4.4	°C/W
R _{thj-a}	Maximum Thermal Resistance, Junction-ambient ⁴	62.5	°C/W



AP70SL1K4BH

Electrical Characteristics @T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	700	-	-	V
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V _{GS} =10V, I _D =1A	-	-	1.4	Ω
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	2	-	5	V
I _{D(ON)}	On State Drain Current	V _{GS} =10V, V _{DS} =20V	5	-	-	A
g _{fs}	Forward Transconductance	V _{DS} =20V, I _D =1A	-	2.4	-	S
I _{DSS}	Drain-Source Leakage Current	V _{DS} =560V, V _{GS} =0V	-	-	100	uA
	Drain-Source Leakage Current(T _j =150°C)	V _{DS} =560V, V _{GS} =0V	-	-	500	uA
I _{GSS}	Gate-Source Leakage	V _{GS} =±20V, V _{DS} =0V	-	-	±1	uA
Q _g	Total Gate Charge	I _D =1.5A	-	11.2	18	nC
Q _{gs}	Gate-Source Charge	V _{DS} =480V	-	3	-	nC
Q _{gd}	Gate-Drain ("Miller") Charge	V _{GS} =10V	-	5	-	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =400V	-	11	-	ns
t _r	Rise Time	I _D =1.5A	-	9	-	ns
t _{d(off)}	Turn-off Delay Time	R _G =10Ω	-	27	-	ns
t _f	Fall Time	V _{GS} =10V	-	15	-	ns
C _{iss}	Input Capacitance	V _{GS} =0V	-	380	608	pF
C _{oss}	Output Capacitance	V _{DS} =100V	-	15	-	pF
C _{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	6	-	pF
R _g	Gate Resistance	f=1.0MHz	-	12	24	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
I _S	Source Current (Body Diode)	T _C =25°C	-	-	3.2	A
V _{SD}	Forward On Voltage ²	I _S =1.5A, V _{GS} =0V	-	0.8	-	V
t _{rr}	Reverse Recovery Time	I _S =1.5, V _{GS} =0V	-	130	-	ns
Q _{rr}	Reverse Recovery Charge	di/dt=100A/μs	-	610	-	nC

Notes:







- 1.Pulse width limited by max. junction temperature.
- 2.Pulse test
- 3.Limited by max. junction temperature. Maximum duty cycle D=0.75
- 4.Surface mounted on 1 in² copper pad of FR4 board
- 5.Starting T_j=25°C , V_{DD}=50V , L=150mH , R_G=25Ω
- 6.I_{SD} ≤ I_D, V_{DD} ≤ BV_{DSS}, starting T_j = 25°C

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

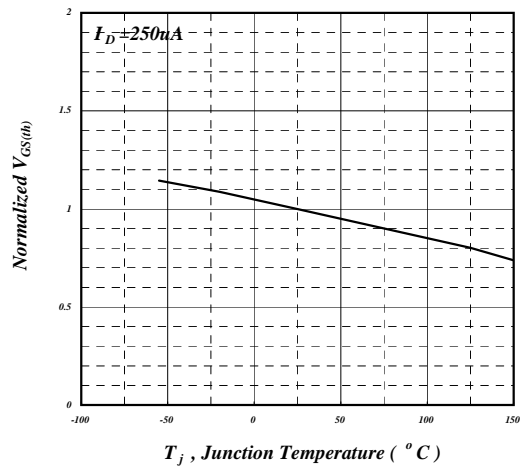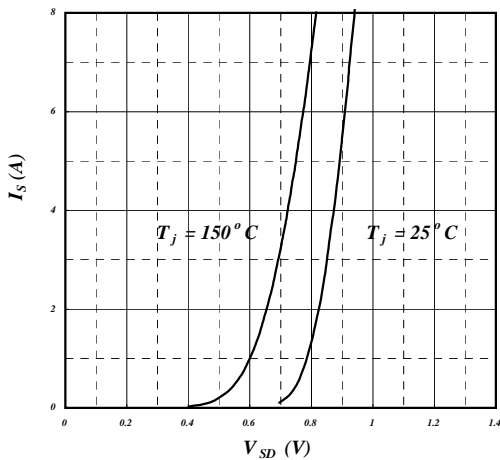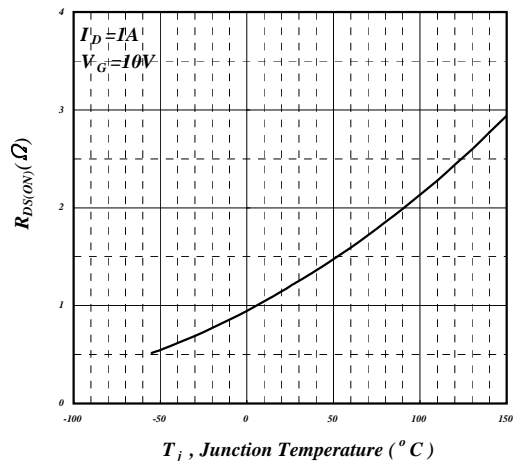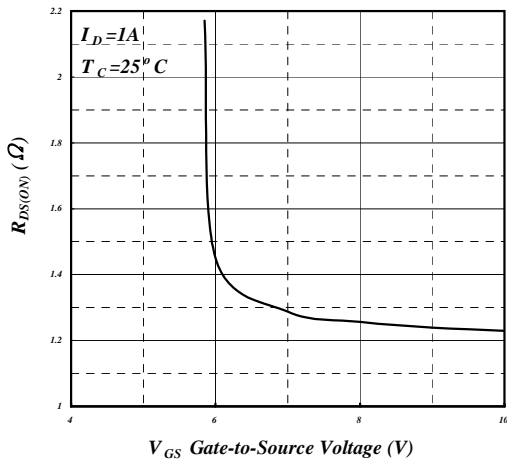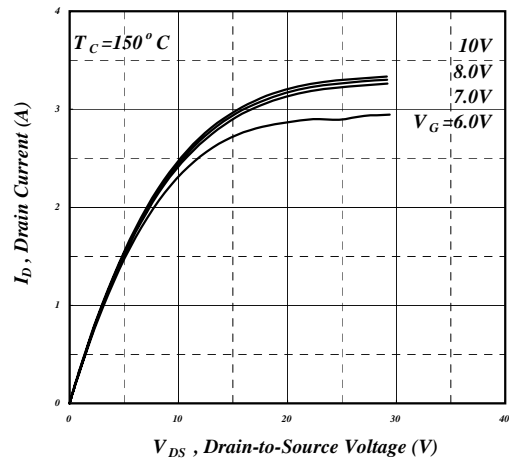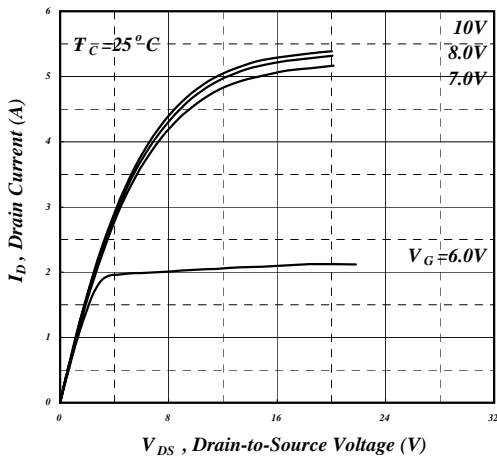

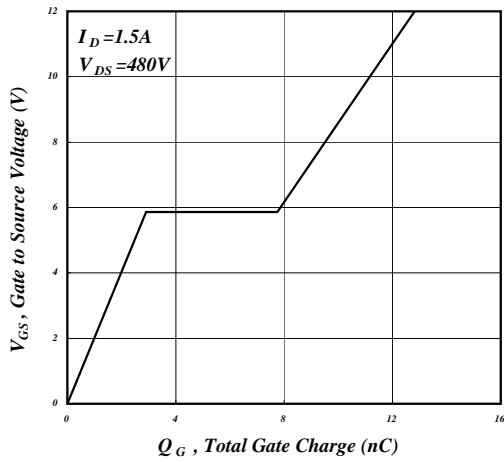


Fig 7. Gate Charge Characteristics

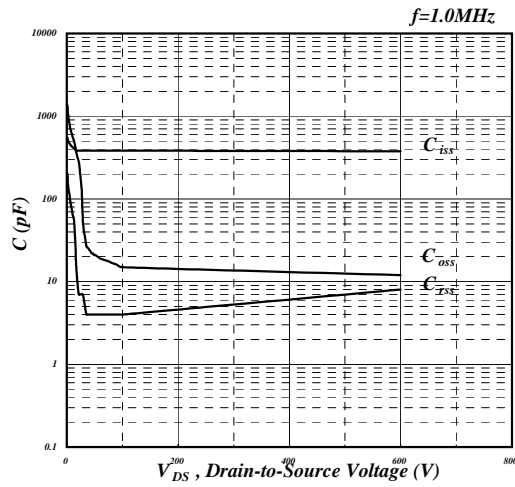


Fig 8. Typical Capacitance Characteristics

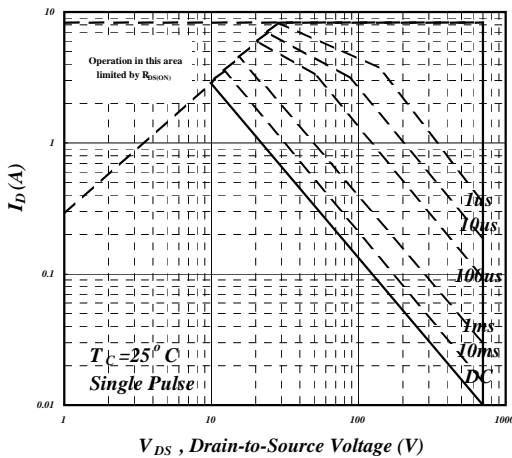


Fig 9. Maximum Safe Operating Area

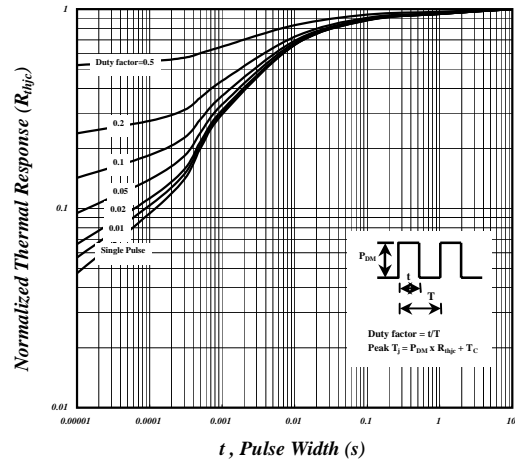


Fig 10. Effective Transient Thermal Impedance

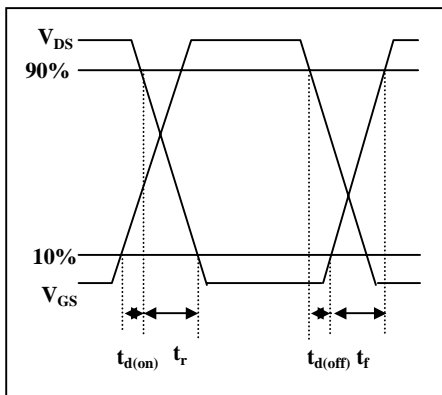


Fig 11. Switching Time Waveform

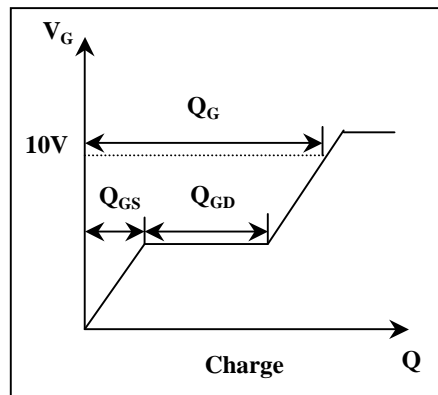


Fig 12. Gate Charge Waveform

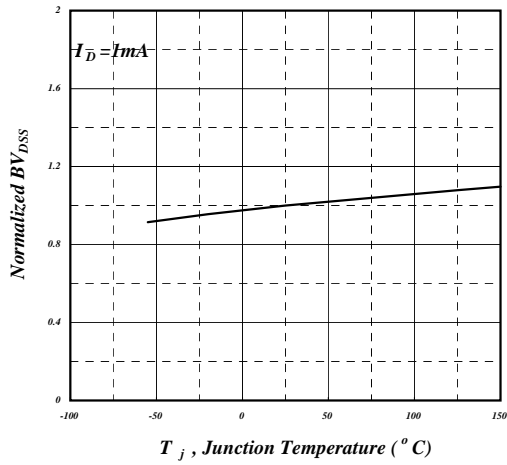


Fig 13. Normalized BV_{DSS} v.s. Junction Temperature

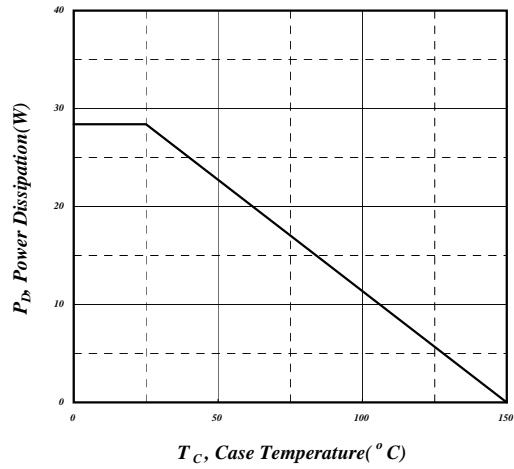


Fig 14. Total Power Dissipation

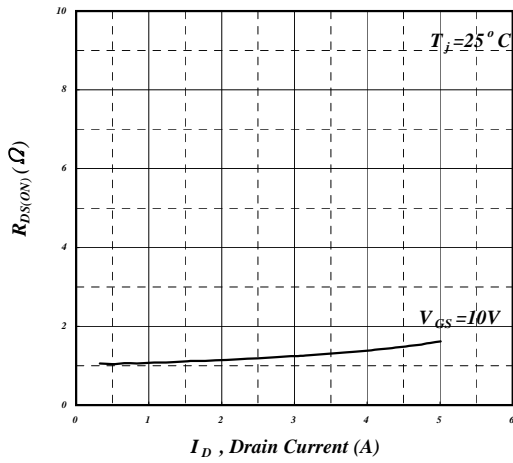


Fig 15. Typ. Drain-Source on State Resistance


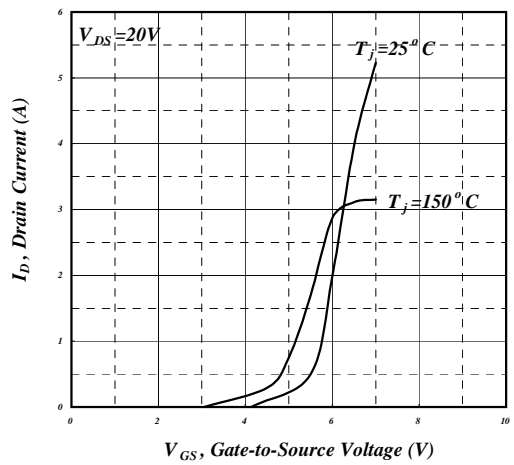


Fig 16. Transfer Characteristics




AP70SL1K4BH

MARKING INFORMATION

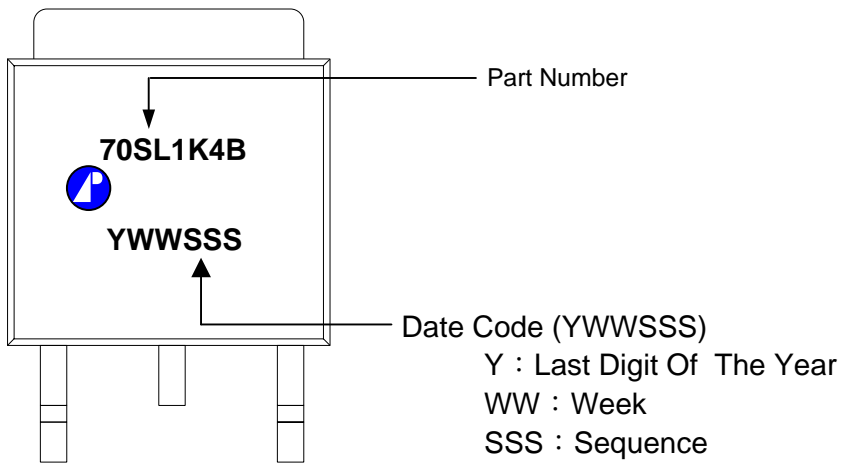




Package Outline : TO-252

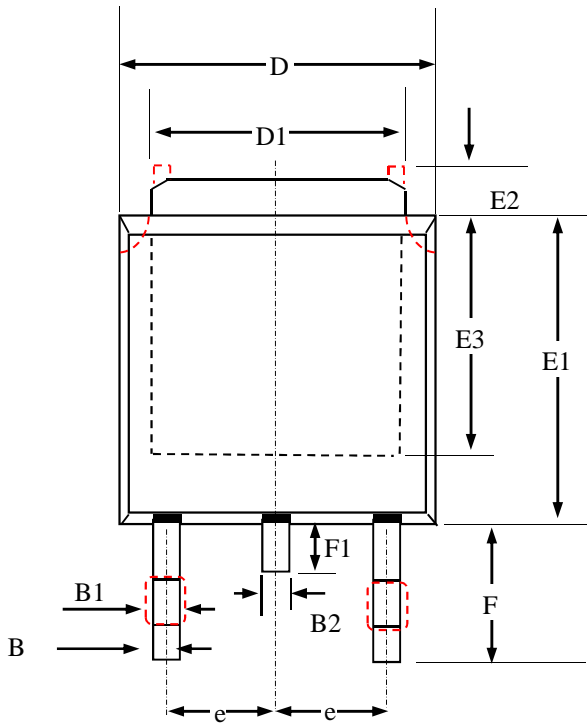

SYMBOLS	Millimeters		
	MIN	NOM	MAX
A2	2.18	2.30	2.40
A3	0.40	0.50	0.65
B	0.40	0.70	1.00
B1	0.50	0.85	1.20
D	6.00	6.50	6.80
D1	4.80	5.35	5.90
E3	4.00 (ref.)		
F	2.00	2.63	3.05
F1	0.50	0.85	1.20
E1	5.00	5.70	6.30
E2	0.50	1.10	1.80
e	2.3 (ref)		
C	0.35	0.525	0.70
A1	0.00	—	0.25
B2	—	—	1.25
L	0.90	1.34	1.78

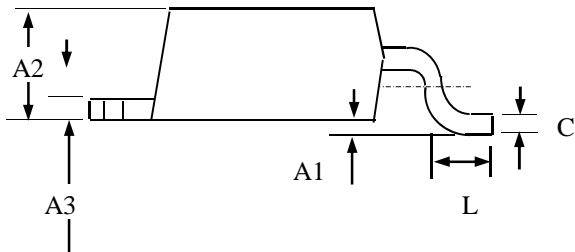

- 1.All Dimensions Are in Millimeters.
- 2.Dimension Does Not Include Mold Protrusions.
3. Thermal PAD, Body and Pin contour is for reference, it may has little difference by option.



TO-252 FOOTPRINT :

